

H O P P E R S

Calbreath




GALBREATH HOPPERS... IN STOCK AND READY TO SHIP!

Galbreath always has a large supply of self-dumping hoppers in all sizes, capacities, and colors. It takes tough durability to withstand the harsh elements of the production floor. That's why Galbreath self-dumping hoppers are built strong with heavy-duty gauge steel and welded seams







HEAVY DUTY SELF DUMPING HOPPERS WITH FORMED BASE

Designed for fork lift handling of materials. Used for plant housekeeping, in-process material handling, sorting and storing operations, scrap collection, etc. 3/16" (7 gauge) body with angle reinforcement-formed steel base – 1" plate rocker stops.

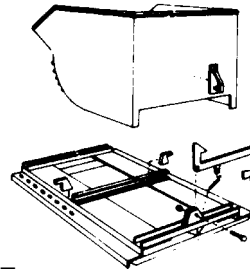

FORMED
STEEL BASE

ROCKER AND STOP FOR
MODEL H25-H150

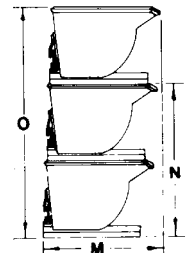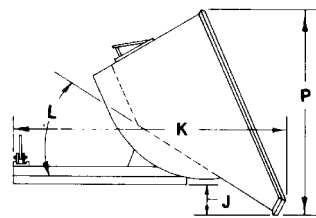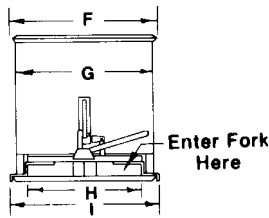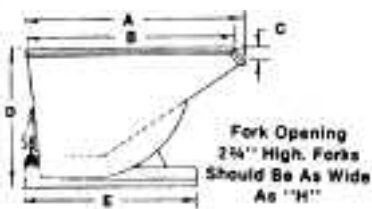

MODEL	VOL CAP	WT CAP*	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	SHIP WT
H-125	1/2 Yd.	1,500#	31"	30 1/2"	0"	17 1/2"	29"	31"	30"	25"	31"	4 1/2"	39"	45°	NON-STACKABLE			29 1/2"	254#
H-25	1/4 Yd.	3,000#	46"	45 1/2"	0"	26 1/2"	42 1/2"	30"	29"	23 1/2"	31 1/2"	7"	56 1/2"	45°	52"	51 1/2"	76 1/2"	45"	400#
H-375	3/4 Yd.	3,000#	47"	44"	2 1/2"	31"	42 1/2"	32"	29"	23 1/2"	31 1/2"	6"	60"	42°	54"	60 1/2"	90 1/2"	46"	420#
H-50N	1/2 Yd.	4,000#	49 1/2"	46 1/2"	5 1/2"	35 1/2"	42 1/2"	32"	29"	23 1/2"	31 1/2"	8"	65"	42°	61"	69 1/2"	103 1/2"	49"	420#
H-50	1/2 Yd.	4,000#	47"	44"	2 1/2"	31"	42 1/2"	39"	36"	30 1/2"	39"	7"	60"	42°	58"	61 1/2"	91 1/2"	46"	460#
H-75	3/4 Yd.	5,000#	59"	55 1/2"	3"	36 1/2"	48"	39"	36"	30 1/2"	39"	11"	71"	41°	65"	72 1/2"	108 1/2"	57"	580#
H-100	1 Yd.	6,000#	62"	58"	4"	38 1/2"	48"	39"	36"	30 1/2"	39"	9"	75"	35°	68"	75 1/2"	112 1/4"	58"	600#
H-150	1 1/2 Yd.	6,000#	67"	59 1/2"	8"	46 1/2"	54 1/2"	44 1/2"	41"	35 1/2"	43 1/4"	6"	85"	35°	73"	91 1/2"	136 1/2"	63"	750#


*Weight capacity factory test up to weights shown. Note: When stacking loaded hoppers, factory recommends maximum weights in each hopper of 2500# for 3 hoppers high and 4000# for 2 hoppers high.

FORK LIFT OPERATED SELF DUMPING HOPPERS


HEAVY DUTY SELF DUMPING HOPPERS WITH STRUCTURAL BASE

Designed for fork lift handling of material when working area will accommodate wider and larger capacities. Used for plant housekeeping, in-process material handling, sorting and storing operations, scrap collection, etc. – 3/16" (7 gauge) body with angle reinforcement and structural steel base – 1" round rocker stops on 1-1/2 W, 2-1/2 yd. – 1-1/4" round rocker stops on 3, 4, and 5 yd.

H-100 AND H-500 HOPPERS





PRESS FITTED ROCKER PINS AND STOP FOR 1/8, 2, AND 2-1/2 YD.

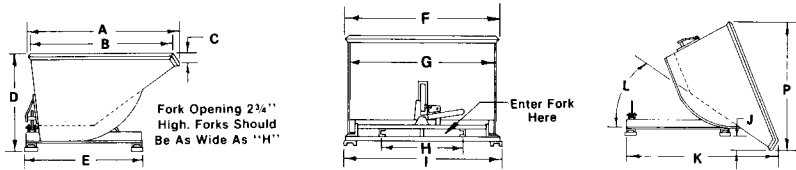

Fork Opening 2 3/4" High. Forks Should Be As Wide As "H"

Enter Fork Here



STRUCTURAL STEEL BASE

MODEL	VOL CAP	WT CAP*	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	SHIP WT
H-150W	1 1/2 Yd.	6,000#	62"	58"	3 7/8"	40"	48 1/2"	57"	54"	32"	58"	8"	75"	37°	74"	78 3/4"	117 1/2"	59"	790#
H-200	2 Yd.	6,000#	66"	59 1/2"	8"	48"	56 1/2"	57"	54"	32"	58"	5"	87"	32°	78"	94 3/4"	141 1/2"	65"	920#
H-250	2 1/2 Yd.	6,000#	67"	56"	15"	55"	56 1/2"	57"	54"	32"	58"	4"	93"	35°	79"	108 3/4"	162 1/2"	68"	950#
H-300	3 Yd.	5,000#	72 1/2"	63"	11 1/2"	58 1/2"	59"	63"	60"	32"	54 1/2"	1/2"	98"	25°	NEST ONLY			60"	1250#
H-400	4 Yd.	4,000#	72 1/2"	63"	11 1/2"	58 1/2"	59"	83"	80"	32"	54 1/2"	1/2"	98"	25°	NEST ONLY			60"	1430#
H-500	5 Yd.	4,000#	72 1/2"	63"	11 1/2"	58 1/2"	59"	103"	100"	32"	54 1/2"	1/2"	98"	25°	NEST ONLY			60"	1570#

*Weight capacity factory test up to weights shown. Note: When stacking loaded hoppers, factory recommends maximum weights in each hopper of 2500# for 3 hoppers high and 4000# for 2 hoppers high.


LIGHT DUTY SELF DUMPING HOPPERS

Designed for fork lift handling of trash and other lightweight materials. Especially useful for in-plant housekeeping. 12 gauge body with formed steel base – full width rocker stop support. Note: L, M & N dimensions are for shipping information only.

LH HOPPER FOR IN-PLANT HOUSEKEEPING





ROCKER AND STOP FOR LH HOPPERS

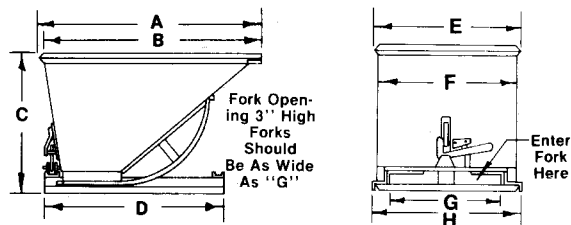


Fork Opening 3" High. Forks Should Be As Wide As "G"

Enter Fork Here

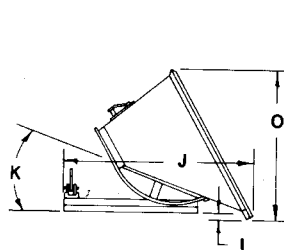

LH-50 & LH-100 Hoppers Stack Only*



LH-150, 200 & 250 Hoppers Nest Only*

MODEL	VOL CAP	WT CAP*	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	SHIP WT
LH-50	1/2 Yd.	1,500#	50"	48 1/2"	29 1/4"	39"	39"	36"	30 1/2"	38 1/2"	8"	59"	29°	54"	55"	81"	47"	369#
LH-100	1 Yd.	1,500#	60 1/2"	59"	37 1/4"	48"	39"	36"	30"	38 3/4"	5"	75"	20°	73 1/4"	66"	109 1/4"	57"	417#
LH-150	1 1/2 Yd.	2,000#	60 1/2"	59"	37 1/4"	48"	57"	54"	30"	38 3/4"	5"	75"	20°	75"	67"	77"	57"	472#
LH-200	2 Yd.	2,000#	60 1/2"	59"	44 1/4"	48"	57"	54"	30"	38 3/4"	4 1/2"	81 1/2"	25°	75"	75"	93 1/2"	58"	509#
LH-250	2 1/2 Yd.	2,000#	60 1/2"	59"	44 1/4"	48"	71"	68"	30"	38 3/4"	4 1/2"	81 1/2"	25°	75"	75"	93 1/2"	58"	619#

Weight capacity factory tested up to weights shown.

*LH Models Are Not Designed To Be Stacked When Loaded.

HEAVY DUTY SELF DUMPING HOPPERS LOW PROFILE MODELS


Low profile design offers the advantage of increased capacity for equipment demanding a lower height requirement. Units incorporate a new heavy duty base for fork lift handling of materials, in-plant housekeeping, scrap collection, etc. – 3/16" (7 gauge) body with angle reinforcement – 1" round rocker stops.






LP
HOPPER
LOADED



LP HOPPER DUMPING

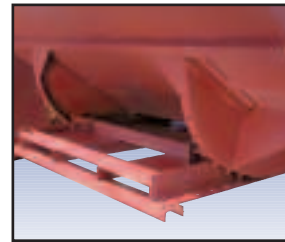

LOW
PROFILE
BASE

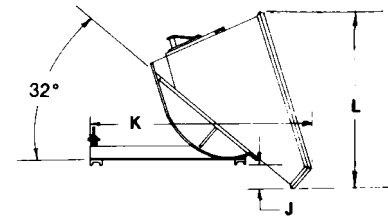


MODEL	VOL CAP	WT CAP*	A	B	C	D	E	F	G	H	I	J	K	L	SHIP WT
H-250LP	2½ Yd.	6,000#	66"	59½"	7½"	48"	56½"	65½"	62"	47½"	54½"	5"	87"	65"	1151#
H-300LP	3 Yd.	5,000#	66"	59½"	7½"	48"	56½"	85½"	82"	47½"	54½"	5"	87"	65"	1304#
H-350LP	3½ Yd.	5,000#	66"	59½"	7½"	48"	56½"	99½"	96"	47½"	54½"	5"	87"	65"	1416#



*Weight capacity factory test up to weights shown.

OPEN END SELF DUMPING HOPPERS

Designed for fork lift handling of long materials such as shear off falls, wood, re-bar, pipe, etc. 3/16" (7 gauge) body with formed channel frame and formed steel base – 1" round rocker stops



Fork Opening
2¾" High.
Forks Should
Be As Wide
As "F"

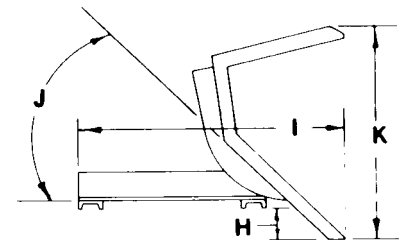

MODEL	A	B	C	D	E	F	G	H	I	J	K	SHIP WT
HOE-1	37½"	34½"	30"	33"	MIN 42"	30½"	37½"	6"	47½"	42°	38"	360#
HOE-2	67"	64"	46½"	48½"	MIN 54"	30½"	40"	12½"	77"	37°	65½"	690#



* Item E may be increased as required in 6" increments. Weight capacity – Factory tested up to 6,000 lbs.

MANUAL OPERATED DOCK CARTS

DC MODEL DOCK CART

Designed for manual handling of paper, cardboard, wood and other lightweight, in-plant refuse – 2 rigid & 2 swivel 6" x 2" rubber mold-on casters – 14 gauge steel body.

CAUTION: Manual lifting should not exceed individual capacity.



MODEL	VOL CAP	WT CAP*	A	B	C	D	E	F	G	H	I	SHIP WT
DC-100	1 Yd.	1,600#	57"	59"	41"	30½"	27"	35½"	21"	7½"	33"	215#
DC-150	1½ Yd.	1,600#	57"	59"	41"	44½"	41"	35½"	35"	7½"	33"	253#
DC-200	2 Yd.	1,600#	57"	59"	41"	57½"	54"	35½"	48"	7½"	33"	287#

*Weight capacity factory test up to weights shown.

SELF DUMPING HOPPER FEATURES




SHOWN IN STANDARD RED OXIDE PRIMER FINISH AND OPTIONAL PAINT COLOR




STANDARD HOPPER LOCK

No. 22 PULL BRACKET WITH 10' NYLON ROPE (OPTIONAL)



OPERATING INSTRUCTIONS



PRESS FITTED ROCKER PIN



SPRING LOADED LATCH WITH REINFORCED LATCH PIN

SELF DUMPING HOPPER OPTIONAL EQUIPMENT



**POLYURETHANE CASTER –
TWO SWIVEL AND TWO RIGID**



**SEMI-STEEL CASTER -
TWO SWIVEL AND TWO RIGID**



**RUBBER MOLD-ON CASTER –
TWO SWIVEL AND TWO RIGID**



**PHENOLIC CASTER –
TWO SWIVEL AND TWO RIGID**


OPTION	TYPE	CAP.	WHEEL	BEARING	HEIGHT	WEIGHT
No. 1	4" Semi-Steel	3200 Lbs.	4" x 1½"	Roller	5¾"	28 Lbs.
No. 2	6" Semi-Steel	3600 Lbs.	6" x 2"	Roller	7½"	46 Lbs.
No. 3	8" Semi-Steel	4200 Lbs.	8" x 2"	Roller	10"	64 Lbs.
No. 4	6" Phenolic	3600 Lbs.	6" x 2"	Self Lub.	7½"	44 Lbs.
No. 5	6" Rubber – Mold-On	1640 Lbs.	6" x 2"	Roller	7½"	42 Lbs.
No. 6	8" Rubber – Mold-On	2000 Lbs.	8" x 2"	Roller	10"	60 Lbs.
No. 7*	6" Rubberex	2000 Lbs.	6" x 2"	Sleeve	7¼"	32 Lbs.
No. 7A	6" Polyurethane	3600 Lbs.	6" x 2"	Roller	7¼"	36 Lbs.
No. 7B	8" Polyurethane	3600 Lbs.	8" x 2"	Roller	9½"	38 Lbs.

*Available for LH Models Only


Casters: NOTE: Caster orders will not be accepted for models H-300, H-300LP, H-350LP, H-400, or H-500.



**No. 8 HOPPER RETAINING
CHAIN AND BRACKET**

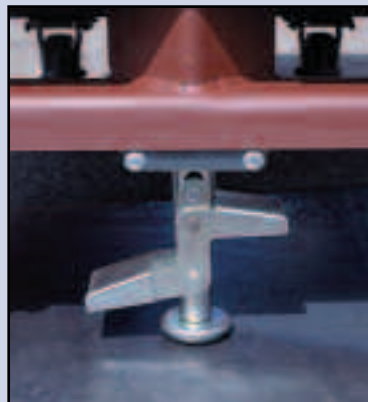

No. 9 HOPPER FLOOR LOCK

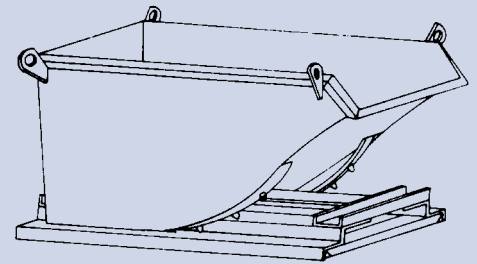

**No. 10 CRANE PICK-UP EYES
(2 EACH SIDE) 8 LBS.**




**No. 12 THREE WAY ENTRY - 1/4 CU. YD.-
3 CU. YD. SIZES ONLY**




**No. 13 PLATFORM LEGS (UP TO 8" CLEARANCE) 46 LBS.
No. 14 PLATFORM LEGS (9" TO 12" CLEARANCE) 60 LBS.
No. 15 PLATFORM LEGS (13" TO 18" CLEARANCE) 85 LBS.**

HOPPER COVERS


Manufactured from 14 ga. steel



TYPE A
WELD ON BACK WITH SINGLE
CENTER HINGE

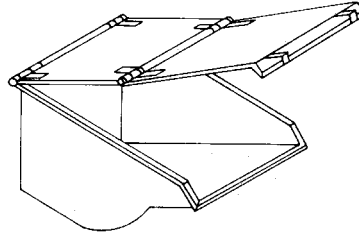

TYPE B
DOUBLE HINGED – BACK AND CENTER

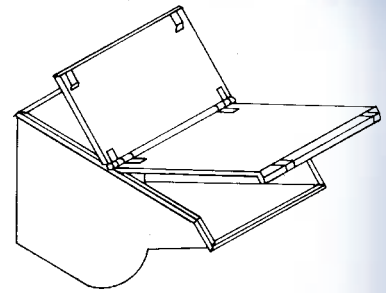


TYPE C
SINGLE HINGED CENTER

OPTION	HOPPER SIZE	TYPE A	TYPE B	TYPE C
No. 16	½ Yd.	50 Lbs.	56 Lbs.	54 Lbs.
No. 17	¾ and 1 Yd.	59 Lbs.	64 Lbs.	62 Lbs.
No. 18	1½ Yd.	80 Lbs.	86 Lbs.	85 Lbs.
No. 19	2 Yd.	102 Lbs.	110 Lbs.	108 Lbs.
No. 20	2½ Yd.	109 Lbs.	117 Lbs.	114 Lbs.

Covers are a non-inventory item. Extra manufacturing time should be allowed.



**LH HOPPER
DUMPING INTO
CONTAINER**

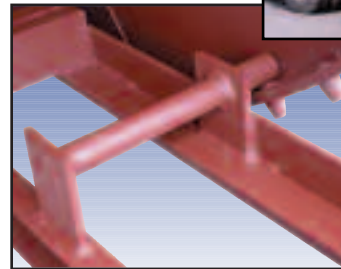

**ROCKER AND STOP FOR
3, 4, AND 5 Yd.**

GALBREATH MATERIAL HANDLING PRODUCTS WARRANTY

Galbreath, Incorporated manufactured hoppers are warranted against failures caused by defective materials and workmanship for a period of 90 days from the date of shipment from our factory, providing the hoppers are used as recommended by the factory.

There are no warranties by Galbreath, Incorporated covering parts, components, or accessories manufactured by someone other than Galbreath, Incorporated.

This warranty is expressly in lieu of all other warranties, expressed or implied, and of all other obligations or liabilities on the part of GALBREATH, INCORPORATED, and it neither assures nor authorizes any other person to assure for it any other liability in connection with the sale herein contemplated.

Galbreath®

GALBREATH
INCORPORATED



Galbreath and **Galbreath** are registered trademarks of Galbreath, Inc., Winamac, IN

GENUINE AFTERMARKET PARTS

To keep the Galbreath quality running long, call for Genuine Galbreath Aftermarket Parts at 800-946-9476.

Fax: 574-946-4579



CORPORATE HEADQUARTERS:

461 E. Rosser Drive
P.O. Box 220
Winamac, IN 46996
574-946-6631
800-285-0666 (Inside U.S.A.)
Fax: 574-946-4579

ALABAMA FACILITY:

Highway 75 South, Route #1
P.O. Box 160
Ider, AL 35981
256-657-6140
800-964-6478 (Inside U.S.A.)
Fax: 256-657-6147

TEXAS FACILITY:

P.O. Box 530004
Grand Prairie, TX 75053-0004
817-477-4564
800-297-0668 (Inside U.S.A.)
Fax: 817-473-7657

AFTERMARKET PARTS:

800-946-9476
Fax: 574-946-4579

PAINT CHART



No. P1001
White



No. P1002
Gray



No. P1003
Silver Gray



No. P1004
Black



No. P1005
Yellow



No. P1006
Chrome Yellow



No. P1008
Cream



No. P1009
Beige



No. P1011
Spanish Orange



No. P1012
Red



No. P1013
Light Blue



No. P1015
Medium Blue



No. P1016
Dark Blue



No. P1017
Vista Green



No. P1018
Medium Green



No. P1017
Bright Green



No. P1019
Dark Green



No. P1020
Burgundy



No. P1022
Cocoa Brown



No. P1023
Red Oxide Primer

Printing limitations prevent exact duplication of finish colors.

Please Order By Color and Number To Eliminate Errors



For more information about Galbreath products, log on to our web site at galbreath-inc.com.

On the web, click on me for more info.

To learn more about Wastequip, go to www.wastequip.com.

Galbreath
A WASTEQUIP COMPANY

ISO 9001:2000
Certified Company

CAUTION! This equipment should be operated by properly trained personnel. Operators should become familiar with OSHA, ANSI, and any other applicable standards or laws for using this equipment. Improper use, misuse, or lack of maintenance could cause injury to people and/or property. Photos used in this brochure are illustrative only. We assume no liability or responsibility for proper training/operation of equipment not manufactured by Galbreath. We reserve the right to make changes at any time without notice. Information contained within this literature is intended to be the most accurate available at time of printing.