

# LIAFRITE®

A TRADITION OF QUALITY,  
DURABILITY, AND VALUE,  
IN PEDESTRIAN CONTROLLED VEHICLES



- ✓ -3/8" Thick Formed Steel Mast Channels
- ✓ -Automatic Built-in Battery Charger
- ✓ -LED Battery Charge Indicator
- ✓ -Solid Steel Adjustable Forks
- ✓ -Mechanical Stacker Positioners

## STACKERS - OPTIONS AND SPECIFICATIONS




**Work platform** - For maintenance work at raised levels. Equipped with fork pockets for quick fit to your Lift-Rite stacker. Recommended remote control with coil cord for work platform applications.



**Slip on platform** - Provides a work surface that can be raised or lowered to suit various applications.



**Optional Power Requirement** - 12 volt DC battery with LED battery indicator (standard), 110 volt AC, 220 volt AC, or Air motor unit.

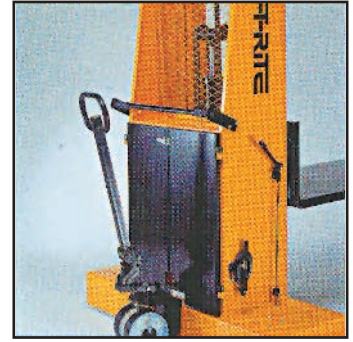

**5th Wheel** - Enhances the mobility and handling of the push stacker for precise and/or tight steering.


Other options and attachments are available. Please contact your authorized Lift-Rite dealer.

## SINGLE STAGE STACKER MODELS

Model	LL68 (Single Stage Mast)
Capacity (lbs)	*1500/2000/2500
Raised height (inches)	68
Load center (inches)	24
Fork length (inches)	36/42/48
Fixed straddle ID (inches)	42/44/50
Fixed straddle OD (inches)	48/50/56
**Adjustable straddle ID/ OD (inches)	38-50/44-56
Overall height forks lowered (inches)	*82/87
Overall height forks raised (inches)	*82/87
Straddle length (inches)	30 1/2
Weight (lbs)	640 - 870

\* Notes applicable dimensions for particular model capacity

\*\* Models with adjustable straddles provide 6" of adjustability per side in 2" increments

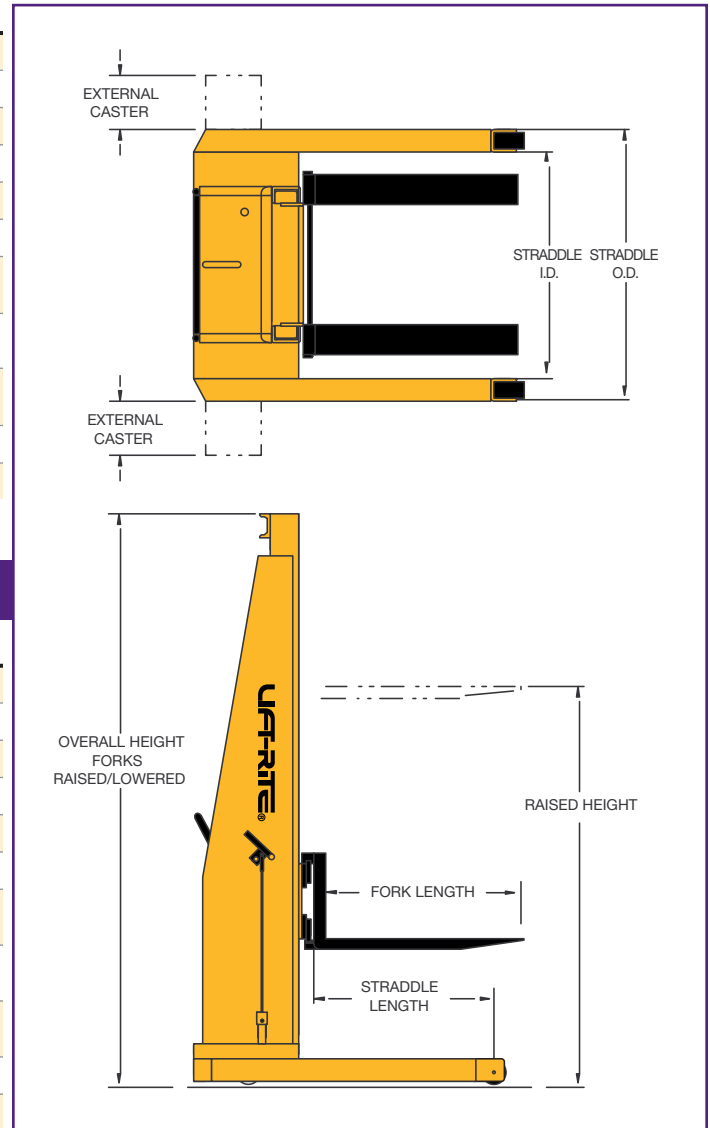

## TELESCOPIC STACKER MODELS

Model	T132 (Two Stage Mast)	T144 (Two Stage Mast)
Capacity (lbs)	2000/*2500	2000
Raised height (inches)	132	144
Load center (inches)	24	24
Fork length (inches)	36/42/48	36/42/48
Fixed straddle ID (inches)	42/44/50	42/44/50
Fixed straddle OD (inches)	48/50/56	48/50/56
**Adjustable straddle ID/ OD (inches)	42-54/48-60	N/A
Overall height forks lowered (inches)	88/*93	94
Overall height forks raised (inches)	154/*159	166
Straddle length (inches)	30 1/2	30 1/2
Weight (lbs)	1000-1170	1150-1200

\* Notes applicable dimensions for particular model capacity

\*\* Models with adjustable straddles provide 6" of adjustability per side in 2" increments

PLEASE CONSULT YOUR AUTHORIZED LIFT-RITE DEALER FOR SPECIAL DESIGN STACKER APPLICATIONS.

# LIFT-RITE®

Due to LIFT-RITE'S continuing product development program, specifications are subject to change without notice. Contact your authorized LIFT-RITE dealer to confirm the most recent specifications.