



Contact Factory for Special Design Requirements

48 Hours to Ship



Electric Hydraulic Scissor Lift Tables

Full featured electric hydraulic scissor lift tables are used by all types of manufacturing and warehouse facilities. Safety features include: electric toe guard to protect pinch points during lowering of the table, brass velocity fuse to maintain platform height regardless of hydraulic pressure, 24V AC push-button hand control, maintenance prop, and upper travel limit switch to stop table at maximum height, reducing motor wear. 2HP, 460V, 3 phase, 60 Hz totally enclosed motor standard, other voltages available. 3000 psi hydraulic component rating.

QUICKSHIP (460V 3 PHASE ONLY)							
MODEL NUMBER	PLATFORM SIZE (W x L)	LOWERED HEIGHT	RAISED HEIGHT	CAPACITY (POUNDS)	VOLTAGE PHASE	NET WT. (POUNDS)	LIST PRICE EACH
EHLT-2448-3-43	24" x 48"	7"	43"	3,000	460/3	700	
EHLT-3060-3-43	30" x 60"	7"	43"	3,000	460/3	725	
EHLT-4048-3-43	40" x 48"	7"	43"	3,000	460/3	800	
EHLT-4848-3-43	48" x 48"	7"	43"	3,000	460/3	825	
EHLT-4872-3-43	48" x 72"	7"	43"	3,000	460/3	975	
EHLT-2448-4-43	24" x 48"	7"	43"	4,000	460/3	775	
EHLT-3060-4-43	30" x 60"	7"	43"	4,000	460/3	800	
EHLT-4048-4-43	40" x 48"	7"	43"	4,000	460/3	850	
EHLT-4848-4-43	48" x 48"	7"	43"	4,000	460/3	910	
EHLT-4872-4-43	48" x 72"	7"	43"	4,000	460/3	1005	

OTHER MOTOR VOLTAGE & PHASE ADD \$160.00 LIST & ONE ADDITIONAL WEEK TO LEAD TIME, model EHLT-VCC DC-20/FC-70

Model Number Format


EHLT - (width)(length) - capacity - raised height

STANDARD FEATURES

- Patented Pinch Point Perimeter Guards for OSHA Compliance
- Fused 24 Volt Push Button Control on 8 ft. Cord
- Adjustable Upper Travel 24V Limit Switch
- Internal Brass Velocity Fuse
- (2HP) 56 Frame Electric Motor
- Pressure Plated Pump & Manifold System
- Robust Heavy Capacity Tables
- Displacement Style Hydraulic Cylinder
- State-of-the-Art Lifetime Lubricated Bearings
- Integral Maintenance Prop



LINE-X® spray on Polyurea/Polyurethane coating available on most Scissor Tables. Contact factory for additional information.



- Optional Foot Control model EHLT-FC

VERTICAL TRAVEL	PLATFORM WIDTH	PLATFORM LENGTH	CAPACITY (POUNDS)	RAISED HEIGHT	LOWERED HEIGHT	TRAVEL (^) TIME (SEC)	NET WT. (POUNDS)	LIST PRICE EACH
36"	24" - 48"	48" - 72"	1,000	43"	7"	7	945	
36"	24" - 48"	48" - 72"	2,000	43"	7"	11	966	
36"	24" - 48"	48" - 72"	3,000	43"	7"	16	987	
36"	24" - 48"	48" - 72"	4,000	43"	7"	22	1008	
36"	36" - 48"	48" - 72"	5,000	44"	8"	32	1029	
36"	36" - 48"	48" - 72"	6,000	44"	8"	32	1050	
36"	36" - 48"	48" - 72"	*8,000	44"	8"	15	1281	
33"	40" - 60"	48" - 72"	*10,000	43"	10"	15	1438	
33"	40" - 60"	48" - 72"	*12,000	43"	10"	15	1596	
48"	24" - 48"	64" - 90"	1,000	55"	7"	11	1155	
48"	24" - 48"	64" - 90"	2,000	55"	7"	16	1176	
48"	24" - 48"	64" - 90"	3,000	55"	7"	22	1197	
48"	36" - 48"	64" - 96"	4,000	56"	8"	32	1218	
48"	36" - 48"	64" - 96"	5,000	56"	8"	32	1239	
48"	36" - 48"	64" - 96"	6,000	56"	8"	48	1260	
48"	36" - 48"	64" - 96"	*8,000	56"	8"	15	1501	
45"	40" - 60"	64" - 96"	*10,000	55"	10"	15	1659	
45"	40" - 60"	64" - 96"	*12,000	55"	10"	20	1816	
60"	24" - 48"	84" - 108"	1,000	67"	7"	16	1785	
60"	24" - 48"	84" - 108"	2,000	67"	7"	14	1806	
60"	24" - 48"	84" - 108"	3,000	67"	7"	16	1827	
60"	48" - 72"	96" - 120"	*4,000	68"	8"	26	1848	
60"	48" - 72"	96" - 120"	*5,000	68"	8"	26	1869	
60"	48" - 72"	96" - 120"	*6,000	70"	10"	30	1890	
60"	62" - 72"	96" - 120"	*8,000	70"	10"	30	2131	
60"	62" - 72"	96" - 120"	*10,000	72"	12"	30	2289	
60"	62" - 72"	96" - 120"	*12,000	72"	12"	30	2446	
72"	24" - 48"	102" - 120"	1,000	79"	7"	12	2047	
72"	24" - 48"	102" - 120"	2,000	79"	7"	16	2068	
71½"	48" - 72"	120" - 144"	*3,000	82"	10½"	16	2089	
71½"	48" - 72"	120" - 144"	*4,000	82"	10½"	26	2110	
71½"	48" - 72"	120" - 144"	*5,000	82"	10½"	26	2131	
71½"	48" - 72"	120" - 144"	*6,000	82"	12"	30	2152	
71½"	62" - 72"	120" - 144"	*8,000	82"	12"	30	2415	

(^) TRAVEL TIME BASED ON 460V THREE-PHASE MOTOR
 *DENOTES 6.5 HP 208-230/460V 3 PHASE (EXTERNALLY MOUNTED)

DC-20/FC-70

Options for Electric Hydraulic Scissor Lift Tables

Mechanical Options

- REMOVABLE 42" HIGH HANDRAIL INCLUDING 21" MIDRAIL & NON-REMOVABLE TOE-BOARD
- NON-REMOVABLE 42" HIGH HANDRAILS INCLUDING 21" MIDRAIL AND TOE-BOARD
- 42" HIGH SELF LOCKING GATE UP TO 6 FEET WIDE
- LINK CHAIN CLOSURE GATE WITH SNAP HOOK ENDS FOR MAXIMUM 6 FEET OPENING
- 4-WAY ANTI-SKID STEEL TREADPLATE DECK/PLATFORM
- SEMI-PORTABILITY OPTION (INCLUDES TWO RIGID WHEELS WITH A TWO WHEEL DOLLY JACK)
- FULL-PORTABILITY OPTION FOR 1,000 TO 3,000 LBS. CAPACITY UNITS UP TO 90" LONG. (INCLUDES TWO RIGID & TWO SWIVEL CASTERS) WITH A NON-REMOVABLE PUSH HANDLE, REINFORCED FRAME AND FOOT OPERATED FLOOR LOCK)
- NFPA-701 FIRE RETARDANT ACCORDION SKIRTING - CUSTOMER INSTALLED (INCLUDES HARDWARE) \$
- NFPA-701 FIRE RETARDANT ACCORDION SKIRTING - FACTORY INSTALLED \$
(PLEASE NOTE: SKIRTING DOES NOT ALLOW FOR ELECTRIC TOEGUARDS)
- 12" LENGTH SPLIT HINGED BRIDGE WITH RUNOFF GUARDS AND LIFTING CHAINS (72" WIDE)
STEEL.....
ALUMINUM.....
- 18" LENGTH SPLIT HINGED BRIDGE WITH RUNOFF GUARDS AND LIFTING CHAINS (72" WIDE)
STEEL.....
ALUMINUM.....
- CAROUSEL (CA-SERIES) MOUNTING TO DECK (PRICING DOES NOT INCLUDE CAROUSEL)
- POWERED CAROUSEL ELECTRIC HYDRAULIC DRIVEN, FIXED-SPEED, HAND CONTROL, MIN. DECK SIZE 54" x 54" MAXIMUM CAPACITY 4,000 LBS. (ADD 3-1/2" TO LOWERED HEIGHT (WEIGHT 210 LBS.)
- AIR CASTER BEARINGS, MANUAL ROTATION CAROUSEL (ADD 3" LOWERED HEIGHT)

Control Options *(available for most powered products)*

- ADDITIONAL 24V PENDANT HAND CONTROL ON 8 FOOT COIL CORD
2 PUSH-BUTTON CONTROL.....
4 PUSH-BUTTON CONTROL.....
- 24V NEMA 4 WALL MOUNT CONTROL STATION
2 PUSH-BUTTON CONTROL.....
4 PUSH-BUTTON CONTROL.....
- ADDITIONAL 24V FOOT CONTROL WITH SAFETY GUARD ON 8 FOOT CORD
2 PEDAL CONTROL FOR LIFT-HOLD-LOWER CIRCUITS
- 4 PEDAL CONTROL FOR LIFT-AND-TILT CIRCUITS
- WIRELESS REMOTE CONTROL
2-BUTTON CONTROL FOR LIFT-HOLD-LOWER CIRCUITS.....
4-BUTTON CONTROL FOR LIFT AND TILT CIRCUITS.....

Motor/Power Options *(available for most powered products)*

- 3 HP / 1-PHASE / 115/208-230V MOTOR @ 1½ GPM EXTERNAL - UPGRADE FROM 2 HP (35 AMP DRAW AT 115V)
- 6.5 HP / 3-PHASE / 208/230-460V MOTOR @ 4 GPM (INCLUDES 15 GALLON TANK)
- NEMA-4 UPGRADE FOR WASH DOWN APPLICATIONS (INCLUDES SPECIAL MOTOR AND ENCLOSURE)
- ROTARY AIR/OIL POWER UNIT (WARRANTY VOID IF USED W/OUT FILTER - REGULATOR - LUBRICATOR (FRL)) (Call factory for AIR REQUIREMENTS 70 CFM @ 70 PSI)
2-BUTTON CONTROL FOR LIFT-HOLD-LOWER CIRCUIT (INCLUDES TOEGUARDS IF STANDARD).....
4-BUTTON CONTROL FOR LIFT-AND-TILT CIRCUITS
- 2 PEDAL CONTROL WITH SAFETY GUARDS
- 4 PEDAL CONTROL WITH SAFETY GUARDS
- 1/2" NPT FILTER-REGULATOR-LUBRICATOR (FRL) - VOID WARRANTY IF USED WITHOUT
- RECIPROCATING AIR/OIL POWER UNIT, FOOT TREADLE CONTROL, FOR 1-3K CAPACITY (NO TOEGUARDS).....
1/4" NPT FILTER - REGULATOR - LUBRICATOR (FRL) - VOID WARRANTY IF USED WITHOUT (15CFM @ 100 PSI).....
- HAZARDOUS LOCATION POWER UNIT FOR LIFT-HOLD-LOWER CONTROL (REMOTELY LOCATED).....
(NO TOEGUARDS; **DIVISION 2 LOCATIONS ONLY**).....

Miscellaneous Options *(available for most powered products except where noted)*

- WARNING LIGHT - OPERATES WHEN UP/DOWN BUTTON IS PRESSED.....
- WARNING BEEPER - OPERATES WHEN UP/DOWN BUTTON IS PRESSED.....
- HIGH CYCLE BEARING PACKAGE (EHLT SERIES) - AVAILABLE ON TABLES WITH A 36" OR 48" VERTICAL TRAVEL NOT EXCEEDING A CAPACITY OF 4,000 POUNDS (ADDS 3" TO LOWERED HEIGHT) (EHLT only).....

CONTACT MANUFACTURER FOR OTHER OPTIONS SUCH AS: 2-SPEED PUMPS, ADDITIONAL LIMIT SWITCHES, APPROACH RAMPS, PAINT OPTIONS, REMOVABLE TOEBOARDS, CONVEYORS, RAILS OR TURNTABLES (MANUAL OR POWERED) ATTACHED TO DECK OR SPECIAL DECK SIZES.



Manual Built-In Carousel for Scissor Tables

Position pallets, boxes, or crates without ever stepping around the table. This sleek flush mounted carousel smoothly rotates 360°. Easy to use operation. Capacity is 4,000 lbs. Carousel adds 1" to scissor table service range. Carousel diameter is 45". Platform size is 48" x 48". Scissor table not included. Option for new table purchase only.

MODEL NUMBER	DESCRIPTION	LIST PRICE EACH
ROTATE	MANUAL BUILT-IN CAROUSEL FOR SCISSOR TABLE	

DC-20/FC-70




DVD or VIDEO AVAILABLE

Accordion Skirting

Accordion Skirts have a functional purpose as well as a safety purpose. Skirts comply with the OSHA pinch point specifications. The functional advantage is minimizing dirt and debris accumulation under the platform. Dirt can contaminate electrical and hydraulic components. Life expectancy of both can be substantially reduced by this contamination. Debris such as raw materials, boards, or pallets can restrict the scissor or table movement. Accordion skirts serve to keep debris from damaging the operating mechanism, hydraulic components, or electrical parts. Safety is enhanced by keeping arms, legs, fingers, and toes out from under the table. Standard electric toe-guards are not included when scissor table is fitted with accordion skirt option.

TABLE SPECIFICATIONS:

- 1) TABLE WIDTH, W = _____"
- 2) TABLE LENGTH, L = _____"
- 3) TABLE RAISED HEIGHT, H = _____"
- 4) TABLE LOWERED HEIGHT, D = _____"

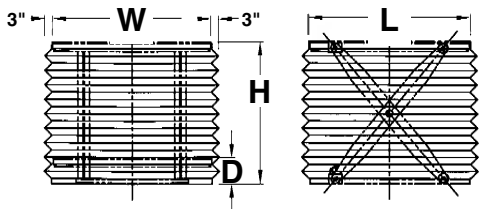

CALCULATION FORMULA: (3" convolutions)

All Dimensions are in Inches

W = Width of Platform L = Length of Platform H = Raised Height

ACCORDION SKIRTING

CUSTOMER INSTALLED (including hardware).....

ACCORDION SKIRTING

FACTORY INSTALLED (includes extra packaging)

FORMULA:

$((W + W + L + L) \times H) \div 144 = \text{Square Feet}$

Square Feet x \$10 (customer installed) or \$14 (factory installed) = List Price


WEIGHT:

0.5 lbs./ft²


REPAIR KIT FOR ACCORDION SKIRTING

model AC-RK.....

Rigid PVC and Roller Curtains Also Available - Contact Factory



OUTSIDE MOUNTING (STANDARD)



WIRELESS REMOTE CONTROL IS FACTORY INSTALLED

Wireless Remote Controls

Put the power in your hands with the Wireless Remote Control System, series RC-460. This lightweight, two-button, remote control gives you the freedom to control your scissor table from a range up to 150 feet (range can be adjusted for optimum signal strength and can be reduced if required). Unit is also available in a four-button model for lift and tilt tables. The remote control measures 4" wide x 6" high x 2" thick.

Approved to meet part 15 of the Federal Communications Code. Designed to prevent crosstalk and false triggering from stray radio frequency. Scissor table not included.


MODEL NUMBER	DESCRIPTION	NET WT. (POUNDS)	LIST PRICE EACH
RC-460-2	2-BUTTON CONTROL (LIFT-HOLD-LOWER CIRCUIT)	1	
RC-460-4	4-BUTTON CONTROL (LIFT AND TILT CIRCUIT)	1	

RETROFIT AVAILABLE - CONTACT FACTORY

DC-20/FC-70

Integral Scale for Scissor Tables

- Validate Number of Pieces or Parts
- Know Exactly How Much Weight is on Your Table
- No Holes or Bolting Required
- Installs and Removes in Seconds
- Expedite Your Shipping & Palletizing Process
- Available in Any Size to Fit an Existing Table (Rests on Top of Table)
- Adds approximately 3" to Overall Height
- Scale Functions: Zero Weight and Tare Weight
- Weighing Units: Pounds or Kilograms
- Scale Capacity: 5,000 lbs.
- Mettler Toledo™ Scale
- Scissor Table Not Included

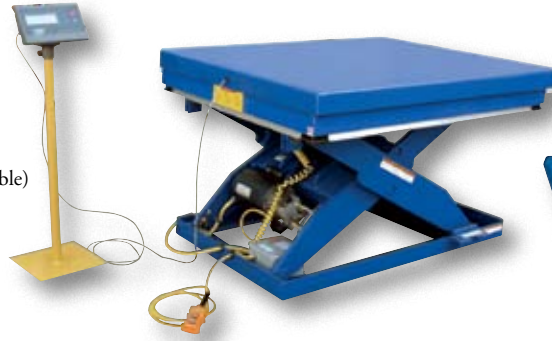

INTEGRAL SCALE
model SCALE

MODEL NUMBER	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE EACH
SCALE	INTEGRAL SCALE	286	


DC-20/FC-70

Auto Sense and Height Index with Integral Scale

- Load and Unload Heavy Loads Easier, Faster and More Efficiently
- Minimum Lifting, Bending and Reaching
- One Touch Auto Height
- Fully Automatic Controller
- Combines precise positioning and weighing capabilities in a single unit
- Fully programmable and automatic:

- Set height function:** Programmable up to four preset heights.
- Increment Function:** When X amount of weight is removed, the table will raise Y inches. 2X amount of weight is removed, the table will raise 2Y inches.
- Decrement Function:** When X amount of weight is added, the table will lower Y inches. 2X amount of weight is added, the table will lower 2Y inches.
- Scale Functions:** Zero weight, Tare (net) weight, and Tare (gross) weight. Raise/Lower Push Buttons on Keypad

- Fully integrated controller with a large display - 2 lines of 20 characters with display function (messages and values)
- A 16-button keypad for programming, editing, and modifying - using all 16 buttons on the panel display
- Scale Capacity: 5,000 lbs.
- Adds approximately 3 inches to the overall lowered height
- Hybrid technology linear sensor is used to control positions at any preset height
- Scissor Table Not Included

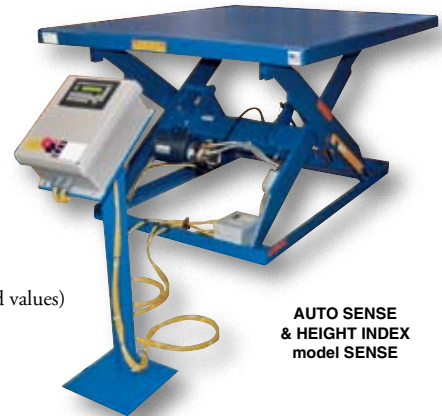

AUTO SENSE
& HEIGHT INDEX
model SENSE

MODEL NUMBER	DESCRIPTION	LIST PRICE EACH
SENSE	AUTO SENSE & HEIGHT INDEX WITH INTEGRAL SCALE	

DC-20/FC-70

Programmable Height

Eliminate unnecessary bending and "land control jogging" by presetting multiple working heights at the touch of a button

- Set height function: Programmable up to 4 preset heights
- Incremental height adjustment for jogging lift at preset increments
- Raise/lower push button on the keypad
- Fully integrated controller with LCD display
- A 15-button keypad for programming, editing, and modifying all 15 buttons on the panel display
- Powered by a 24V DC motor
- Excellent for repeat repositioning applications
- Hybrid technology linear sensor is used to control positions at any preset height
- Scissor Table Not Included



PROGRAMMABLE HEIGHT
model PROGRAM

MODEL NUMBER	DESCRIPTION	LIST PRICE EACH
PROGRAM	PROGRAMMABLE HEIGHT	

DC-20/FC-70

Rotary Air/Hydraulic Scissor Lift Tables

Utilize the efficiency of factory air to power this lift table. Simply connect a 1/2" NPT air line, filter, regulator and lubricator and you now have the most efficient lift table manufactured. Features pneumatic upper travel limit switch, toe guards, internal brass velocity fuse, hinged maintenance prop, two button hand control and state-of-the-art precision pins and bearings.

MODEL NUMBER	PLATFORM SIZE (W x L)	LOWERED HEIGHT	RAISED HEIGHT	CAPACITY (POUNDS)	NET WT. (POUNDS)	LIST PRICE EACH
AHLT-3060-3-43	30" x 60"	7"	43"	3,000	987	
AHLT-4048-3-43	40" x 48"	7"	43"	3,000	987	
AHLT-4848-3-43	48" x 48"	7"	43"	3,000	987	
AHLT-4872-3-43	48" x 72"	7"	43"	3,000	1214	

CONTACT FACTORY FOR SPECIAL SIZES AND CONFIGURATIONS

DC-20/FC-70





REMOTE POWER UNIT
measures 24"W x 24"L x 8"H

Work Station Electric Hydraulic Scissor Tables

Designed to raise products up to an ergonomic working height. The EHLT-WS maximizes safety with minimum space requirements. Ideal for all types of manufacturing and warehouse facilities. External power unit and hand control standard. Electric toe guards standard.

MODEL NUMBER	PLATFORM SIZE (W x L)	LOWERED HEIGHT	RAISED HEIGHT	CAPACITY (POUNDS)	TRAVEL TIME	NET WT. (LBS.)	LIST PRICE EACH
EHLT-WS-2436-1.5-29	24" x 36"	8-5/8"	31"	1,500	13 sec.	700	
EHLT-WS-2448-1.5-36	24" x 48"	7"	36"	1,500	13 sec.	720	
EHLT-WS-3248-1.5-36	32" x 48"	7"	36"	1,500	13 sec.	750	
EHLT-WS-4048-1.5-36	40" x 48"	7"	36"	1,500	13 sec.	780	

TRAVEL TIME BASED ON 3 PHASE POWER

DC-20/FC-70

Shorty Scissor Lift Tables

Built with the same quality as all our lift tables, the EHLTS and EHLTSD maximize safety and durability. Designed to raise products up to an ergonomic working height. When tight spaces are what you have, consider a Shorty Scissor Table. Available in both a single and double leg style these tables offer smaller deck sizes customized to your space requirements. Design features include full perimeter pinch point guard and emergency internal brass velocity fuse. External power unit and hand control standard.

Model Number Format: **EHLTS - (width)(length) - capacity - raised height**



SINGLE LEG SET								
VERTICAL TRAVEL	PLATFORM WIDTH	PLATFORM LENGTH	CAPACITY (POUNDS)	RAISED HEIGHT	LOWERED HEIGHT	TRAVEL TIME (SEC)	NET WT. (POUNDS)	LIST PRICE EACH
24"	24" - 48"	36" - 48"	1,000	31"	7"	12	668	
24"	24" - 48"	36" - 48"	2,000	31"	7"	12	691	
24"	24" - 48"	36" - 48"	3,000	31"	7"	12	730	
24"	24" - 48"	36" - 48"	4,000	31"	7"	23	721	
24"	36" - 48"	36" - 48"	5,000	31"	8"	23	744	
24"	36" - 48"	36" - 48"	6,000	31"	8"	23	792	

TRAVEL TIME BASED ON 3 PHASE POWER

DC-20/FC-70

Model Number Format: **EHLTSD - (width)(length) - capacity - raised height**



DOUBLE LEG SET								
VERTICAL TRAVEL	PLATFORM WIDTH	PLATFORM LENGTH	CAPACITY (POUNDS)	RAISED HEIGHT	LOWERED HEIGHT	TRAVEL TIME (SEC)	NET WT. (POUNDS)	LIST PRICE EACH
42"	34" - 48"	36" - 48"	1,000	51"	10"	16	882	
42"	34" - 48"	36" - 48"	2,000	51"	10"	23	892	
42"	34" - 48"	36" - 48"	3,000	51"	10"	32	903	
42"	34" - 48"	36" - 48"	4,000	51"	10"	32	955	
42"	34" - 48"	36" - 48"	5,000	51"	10"	48	966	


TRAVEL TIME BASED ON 3 PHASE POWER

DC-20/FC-70

Double Scissor Lift Tables

Achieve the extra reach you're looking for with our Double Scissor Lift Tables. These full featured electric hydraulic scissor lift tables are used by all types of manufacturing and warehouse facilities. Safety features include: electric toe guard to protect pinch points during lowering of the table, brass velocity fuse to maintain platform height regardless of hydraulic pressure, 24V AC push-button hand control, maintenance prop, and upper travel limit switch to stop table at maximum height reducing motor wear. 2 HP, 460V, 3-phase, 60 Hz totally enclosed motor standard, other voltages available. 3000 psi hydraulic component rating.

Model Number Format: **EHLTD - (width)(length) - capacity - raised height**

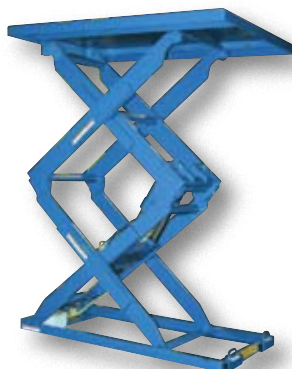

DVD or VIDEO
AVAILABLE

VERTICAL TRAVEL	PLATFORM WIDTH	PLATFORM LENGTH	CAPACITY (POUNDS)	RAISED HEIGHT	LOWERED HEIGHT	TRAVEL TIME (SEC)	NET WT. (POUNDS)	LIST PRICE EACH
60"	34" - 48"	48" - 72"	1,000	70"	10"	11	1470	
60"	34" - 48"	48" - 72"	2,000	70"	10"	16	1575	
60"	34" - 48"	48" - 72"	3,000	70"	10"	22	1680	
60"	34" - 48"	48" - 72"	4,000	70"	10"	32	1890	
60"	34" - 48"	48" - 72"	5,000	70"	10"	34	1942	
72"	34" - 48"	64" - 88"	1,000	84"	12"	16	1576	
72"	34" - 48"	64" - 88"	2,000	84"	12"	32	1680	
72"	34" - 48"	64" - 88"	3,000	84"	12"	48	1785	
72"	34" - 48"	64" - 88"	4,000	84"	12"	48	1968	
72"	34" - 48"	64" - 88"	5,000	84"	12"	48	2021	

TRAVEL TIME BASED ON 460V THREE-PHASE POWER


DC-20/FC-70

Portable Scissor Lift Tables


Heavy-duty powered lift tables are designed to transport and elevate your heaviest loads. A heavy-duty 12V DC power unit with deep cycle battery and an on-board battery charger is standard, a battery charge indicator is optional. Features 8" phenolic casters (2 swivel and 2 rigid), floor lock, and patented electric pinch point guards. Push buttons to raise and lower lift, located on power unit and in the pendant-style push-button control, are standard. Key-operated ON/OFF control for better security is built into the power unit. Minimum frame width is 34". Add 25" to platform length for the overall length.

Model Number Format PST - (width)(length) - capacity - raised height

VERTICAL TRAVEL	PLATFORM WIDTH	PLATFORM LENGTH	CAPACITY (POUNDS)	RAISED HEIGHT	LOWERED HEIGHT	TRAVEL TIME (SEC)	NET WT. (POUNDS)	LIST PRICE EACH
36"	24" - 48"	48" - 72"	1,000	46"	10"	9	1408	
36"	24" - 48"	48" - 72"	2,000	46"	10"	14	1437	
36"	24" - 48"	48" - 72"	3,000	46"	10"	20	1491	
48"	24" - 48"	64" - 90"	1,000	58"	10"	14	1496	
48"	24" - 48"	64" - 90"	2,000	58"	10"	20	1580	
48"	24" - 48"	64" - 90"	3,000	58"	10"	28	1780	



DVD or VIDEO AVAILABLE

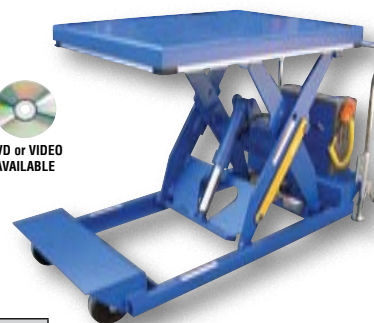

DC-20/FC-70



TILT MASTER STRADDLE WITH PTDS OPTION

PORTABLE SCISSOR TABLE OPTIONS

MODEL NUMBER	DESCRIPTION	NET WT. (POUNDS)	LIST PRICE EACH
PST-AC	AC MOTOR	--	
PST-AIR*	FACTORY AIR OVER OIL (W/FOOT TREADLE CONTROL (FRL REQ'D)*)	--	
PST-FP	MANUAL FOOT PUMP OPTION	--	
PST-PTDS	POWER TRACTION DRIVE SYSTEM	156	
BC	BENCH TOP STYLE BATTERY CHARGER	8	
BCI	BATTERY CHARGE INDICATOR GAUGE	1	

*FILTER REGULATOR - LUBRICATOR REQUIRED TO OPERATE (WARRANTY VOID WITHOUT)



DVD or VIDEO AVAILABLE



PALLET MASTER/PALLET SERVER WITH PTDS OPTION

Power Traction Drive System

Reduce worker fatigue and injury with the Portable Traction Drive Option. This factory installed option is available on portable equipment including the Portable Scissor Table, Pallet Master/Pallet Server, Tilt Master, and High Rise Lift Truck. An alternative to costly fork trucks, the PTDS includes a combination throttle / direction butterfly style controller, an adjustable yoke and an auto reverse emergency "belly" switch. This state of the art option allows a single operator to safely and ergonomically transport products. Power pack is 42" wide. Maximum speed is 2.5 m.p.h.

MODEL NUMBER	DESCRIPTION	NET WT. (POUNDS)	LIST PRICE EACH
PTDS	POWER TRACTION DRIVE SYSTEM	156	

DC-20/FC-70



PORTABLE SCISSOR TABLE WITH PTDS OPTION

Air Bag Scissor Lift Tables

Air Bag Scissor Lift Tables use factory air for clean, dependable, maintenance free operation. Designed to raise products up to an ergonomic working height. Safety features include pressure relief and pinch point guard. Must be used in conjunction with a filter/regulator. We do not recommend the use of a lubricator. Includes hand held control with up and down button mounted on 8 ft. cord. Incoming air must be clean, dry and regulated to 80 psi (min.). Requires ½" incoming airline. Standard features are adjustable upper travel limit valve, state-of-the-art lifetime lubricated bearings and maintenance prop. Other sizes available, contact factory.

Model Number Format ABL - (width)(length) - capacity - raised height

VERTICAL TRAVEL	PLATFORM WIDTH	PLATFORM LENGTH	CAPACITY (POUNDS)	RAISED HEIGHT	LOWERED HEIGHT	TRAVEL TIME (SEC.)	NET WT. (POUNDS)	LIST PRICE EACH
28"	42" - 60"	48" - 72"	2,000	36"	8"	14	897	
28"	42" - 60"	48" - 72"	4,000	36"	8"	28	942	

OPTIONAL FOOT CONTROL, MODEL ABLT-FC, \$195.00 LIST

DC-20/FC-70



LINE-X
Custom Finish Available


Foot Pump Scissor Lift Tables

Foot pump activated lift tables. Used by all types of manufacturing and warehousing facilities. Features torsion tubes for side to side stability, pressure flow control valve for controlled lowering, and foot pump. Optional power-lift feature available (on-board charger included on DC option). Scissor tables can be made mobile with the optional handle and caster kit. Rugged welded steel construction. Painted blue finish.

48 Hours
to Ship



SCTAB-400
SCTAB-800D (double) (not shown)



SCTAB-500



SCTAB-1000
(Shown with
Caster/Handle Kit)

MODEL NUMBER	PLATFORM SIZE (W x L)	CAPACITY (POUNDS)	RAISED HEIGHT	LOWERED HEIGHT	# OF PUMPS AT HIGH/LOW SPEED	NET WT. (POUNDS)	LIST PRICE EACH
SCTAB-400	17½" x 27½"	400	29"	8¼"	19	164	
SCTAB-500	20" x 33"	500	28"	6"	13 / 26	274	
SCTAB-750D	20" x 40"	750	35"	7"	8 / 16	284	
SCTAB-800D	20" x 35½"	800	51"	13"	12 / 39	274	
SCTAB-1000	20" x 40"	1,000	32"	8"	8 / 16	270	
SCTAB-2000	42" x 42"	2,000	32"	8"	16 / 32	386	

DC-20/FC-70

LINE-X
Custom Finish Available

DVD or VIDEO AVAILABLE



SCTAB-750D



SCTAB-750D
(shown with DC power option and
caster handle kit)

FOOT PUMP SCISSOR TABLE OPTIONS

MODEL NUMBER	DESCRIPTION	NET WT. (POUNDS)	LIST PRICE EACH
SCTAB-DC*	12V DC HAND CONTROL WITH DEEP CYCLE BATTERY	54	
SCTAB-AC*	24V AC HAND CONTROL WITH 115V 1 PHASE POWER	36	
SCTAB-AIR*	FACTORY AIR OVER OIL WITH FOOT TREADLE CONTROL	18	
SCTAB-CHK-1*	CASTER & HANDLE KIT (500, 750D & 1000 only)	18	
SCTAB-CHK-2*	CASTER & HANDLE KIT (2000) (FACTORY INSTALLED ONLY) ADD 6½" TO RAISED AND LOWERED HEIGHTS	18	
SCTAB-HDS	HIGH DENSITY PVC SURFACE	4	
SCTAB-BC*	BENCH TOP STYLE BATTERY CHARGER	8	
SCTAB-BCI*	BATTERY CHARGE INDICATOR	1	


*NOT AVAILABLE ON THE SCTAB-400 AND SCTAB-800D



DVD or VIDEO AVAILABLE

Ground Lift Scissor Tables

Designed for use when fork trucks are not available. Pallets can be loaded onto platform with pallet trucks and raised to an ergonomic working height. Safety features include; entry-side electric toe guard to protect pinch points during lowering of the table, velocity fuse to maintain platform height regardless of hydraulic pressure, foot control, maintenance prop, and upper travel limit switch to stop table at maximum height reducing motor wear. 2HP, 208-230/460V, 3-phase, 60 Hz totally enclosed motor is standard, other voltages available. Remote power unit can be located up to eight feet away from table. 3000 psi hydraulic components rating. Optional accordion skirting available, contact factory.




ACCORDION SKIRT AVAILABLE,
CONTACT FACTORY

MODEL NUMBER	PLATFORM SIZE (W x L)	CAPACITY (POUNDS)	RAISED HEIGHT	LOWERED HEIGHT	OVERALL SIZE (W x L x H)	NET WT. (POUNDS)	LIST PRICE EACH
EHLTG-4450-2-36	44" x 50"	2,000	36"	1/2"	67" x 56" x 8½"	1620	
EHLTG-4450-4-36	44" x 50"	4,000	36"	1/2"	67" x 56" x 8½"	1690	
EHLTG-5250-2-36	52" x 50"	2,000	36"	1/2"	75" x 56" x 8½"	1690	
EHLTG-5250-4-36	52" x 50"	4,000	36"	1/2"	75" x 56" x 8½"	1890	
EHLTG-4470-2-48	44" x 70"	2,000	48"	1/2"	67" x 78" x 10"	1995	
EHLTG-4470-4-48	44" x 70"	4,000	48"	1/2"	67" x 78" x 10"	2310	
EHLTG-5270-2-48	52" x 70"	2,000	48"	1/2"	75" x 78" x 10"	2205	
EHLTG-5270-4-48	52" x 70"	4,000	48"	1/2"	75" x 78" x 10"	2520	
OPTIONS							
EHLTG-44-SB	STEEL ROLLOVER BRIDGE FOR 44" WIDE DECKS (8" LONG)					27	
EHLTG-52-SB	STEEL ROLLOVER BRIDGE FOR 52" WIDE DECKS (8" LONG)					33	

DC-20/FC-70

Hydraulic Motorcycle Lift

Manual foot pump activated stationary lift. Ideal for casual and professional riders to work on their motorcycles. Features a front tire cradle to hold wheels up to 6" wide. The hinged ramp measures 27½" wide by 21½" long.



MAINTENANCE DOOR



MODEL NUMBER	OVERALL SIZE (W x L)	BASE FRAME (W x L)	CAPACITY (POUNDS)	SERVICE RANGE	NET WT. (POUNDS)	LIST PRICE EACH
MOTO-LIFT-1100	35" x 108"	26¾" x 65"	1,100	7" to 32"	517	

DC-25/FC-70

Low Profile Electric/Hydraulic Scissor Lift Tables

Load and unload skids with a pallet truck without the need for a pit when using the optional approach ramp. Superior engineering features rugged dependability. Safety features include electric perimeter pinch point guard, emergency stop velocity fuse in cylinders, fused 24V AC hand held control and maintenance supports. Remote power unit comes complete with a plastic cover to protect motor from dust and debris. Note motor voltage and phase when ordering.




Model Number Format EHLTX - (width)(length) - capacity - raised height

VERTICAL TRAVEL	PLATFORM WIDTH	PLATFORM LENGTH	CAPACITY (POUNDS)	RAISED HEIGHT	LOWERED HEIGHT	TRAVEL TIME (SEC)	NET WT. (POUNDS)	LIST PRICE EACH
35¾"	36" - 60"	53" - 60"	1,000	39"	3¼"	14	1470	
35¾"	36" - 60"	53" - 60"	2,000	39"	3¼"	14	1627	
35¾"	36" - 60"	53" - 60"	3,000	39"	4¼"	22	1680	
35¾"	36" - 60"	53" - 60"	3,500	39"	4¼"	22	1869	

APPROACH RAMPS FOR LOW PROFILE SCISSOR TABLES				
MODEL NUMBER	WIDTH	LENGTH	HEIGHT	NET WT. (POUNDS)
ARX-3617-3	36"	17"	3¼"	108
ARX-3623-3	36"	23"	3¼"	186
ARX-3622-4	36"	22"	4¼"	138
ARX-3630-4	36"	30"	4¼"	206

DC-20/FC-70 (ARX SHIP FC-60)



DVD or VIDEO AVAILABLE

REMOTE POWER UNIT measures 24"W x 24"L x 8"H

Low Profile "U" Type Electric Lift Tables

The open center on the "U" Type Electric Lift Tables enables a pallet truck to place a load on the platform. Units feature an external power pack equipped with a pressure relief valve that prevents overloading and a flow control valve that controls the lowering speed. Remote power pack comes complete with steel cover to protect the motor from dust and debris. Raise and lower the unit using the UP and DOWN push-buttons on the 24V control box. Safety features include electric toe guards, velocity fuse in cylinders, safety maintenance props and an emergency stop button on the control box.

MODEL NUMBER	PLATFORM SIZE (W x L)	CAPACITY (POUNDS)	LOWERED HEIGHT	RAISED HEIGHT	NET WT. (POUNDS)	LIST PRICE EACH
EHU-2	45" x 56"	2,000	3-3/8"	33-7/8"	630	
EHU-3	45¾" x 63"	3,000	4-1/8"	33-7/8"	850	

DC-20/FC-70



New

model EHU-2

Lift & Tilt Scissor Tables


Performs both lifting and tilting operations. 45° tilt standard. Restraining chain and 12" high lip to keep the load in place during tilting. Safety features include: electric toe guard to protect worker from pinch points during lowering of table, velocity fuses to stop travel due to loss of hydraulic pressure, 4 push-button hand pendant control on an 8 foot coil cord, upper limit switch to stop travel at maximum height reducing motor wear, and maintenance prop. End tilt standard, side tilt available. Optional accordion skirting available for both the lifting and tilting portions of the table, contact factory.

MODEL NUMBER	PLATFORM SIZE (W x L)	CAPACITY (POUNDS)	RAISED HEIGHT	LOWERED HEIGHT	OVERALL SIZE (W x L)	NET WT. (POUNDS)	LIST PRICE EACH
EHLTT-3648-1-47	36" x 48"	1,000	47"	11"	36" x 53"	1060	
EHLTT-4848-1-47	48" x 48"	1,000	47"	11"	48" x 53"	1113	
EHLTT-3648-2-47	36" x 48"	2,000	47"	11"	36" x 53"	1181	
EHLTT-4848-2-47	48" x 48"	2,000	47"	11"	48" x 53"	1296	
EHLTT-3648-3-47	36" x 48"	3,000	47"	11"	36" x 53"	1249	
EHLTT-4848-3-47	48" x 48"	3,000	47"	11"	48" x 53"	1365	
EHLTT-3648-4-47	36" x 48"	4,000	47"	11"	36" x 53"	1312	
EHLTT-4848-4-47	48" x 48"	4,000	47"	11"	48" x 53"	1433	


LIFT & TILT SCISSOR TABLE OPTIONS		
MODEL NUMBER	DESCRIPTION	NET WT. (POUNDS)
EHLTT-FCH	FOUR PEDAL FOOT CONTROL (LIFT & TILT PRODUCTS)	12
EHLTT-HCA	AIR/OIL POWER W/PNEUMATIC PUSH BUTTON (FRL REQ'D)*	36

*FILTER - REGULATOR - LUBRICATOR REQUIRED TO OPERATE UNIT

DVD or VIDEO AVAILABLE

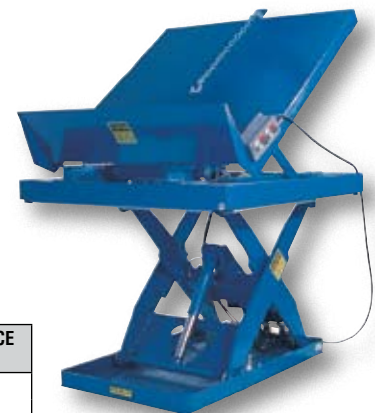

STANDARD END TILT SHOWN



ACCORDION SKIRT AVAILABLE, CONTACT FACTORY

DC-20/FC-70+