

DVD or VIDEO AVAILABLE

Steel Yard Ramps

Quickly load and unload trucks, trailers and rail cars from ground level when no freight dock exists. Increase productivity while reducing material handling costs. Great for construction sites. A manual two-speed hand crank for easy one person height adjustment offers a service range of 45" to 62". Available in 30 foot of straight ramp or 36 foot overall length; 30 foot of straight ramp and 6 foot level off. Standard features include: 9" steel wheels, positive traction open steel grating, safety locking chains, 4" high steel safety curbs, rubber bumpers, 15" overlap lip, and welded steel construction. Painted neutral earth-tone brown.



MANUAL HAND CRANK & 9" STEEL WHEELS



SAFETY LOCKING CHAINS WITH 15" OVERLAP LIP

OPTIONS



27" PNEUMATIC TIRES



HYDRAULIC HAND PUMP model YR-HL



TOW BAR HITCH model YR-TB-H




TOW LOOP model YR-TB



FORK LIFT PICK-UP SLOTS model YR-FS



HANDRAIL (welded) model YR-HDRL

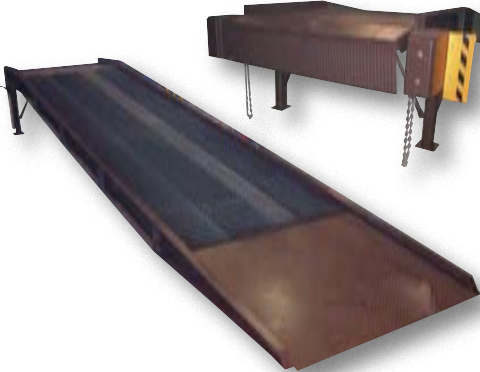

Stationary ramps, series YRDS, include an Edge-Of-Dock Leveler at the truck end. Ramp height is fixed at 50". Leveler offers service range of +/- 5".

PORTABLE STEEL YARD RAMPS

MODEL NUMBER	CAPACITY (POUNDS)	OVERALL** RAMP WIDTH	USABLE RAMP WIDTH	LENGTH (FEET)	NET WT. (LBS.)	LIST PRICE EACH
YR-16-7230	16,000	72"	67"	30	3780	
YR-16-8430	16,000	84"	78"	30	4095	
YR-16-7236	16,000	72"	67"	36	4725	
YR-16-8436	16,000	84"	78"	36	5040	
YR-20-7330	20,000	73"	67"	30	4515	
YR-20-8530	20,000	85"	78"	30	4830	
YR-20-7336	20,000	73"	67"	36	5565	
YR-20-8536	20,000	85"	78"	36	5985	
YR-25-7330	25,000	73"	67"	30	4725	
YR-25-8530	25,000	85"	78"	30	5040	
YR-25-7336	25,000	73"	67"	36	5880	
YR-25-8536	25,000	85"	78"	36	6300	
YR-30-7330	30,000	73"	67"	30	4935	
YR-30-8530	30,000	85"	78"	30	5250	
YR-30-7336	30,000	73"	67"	36	6300	
YR-30-8536	30,000	85"	78"	36	6720	

**ADD 19" TO OVERALL RAMPING WIDTH FOR MAXIMUM OVERALL WIDTH. INCLUDES LANDING GEAR AND CRANK MECHANISM.

DC-20/FC-TL

PORTABLE STEEL YARD RAMPS WITH HAND PUMP HYDRAULIC EDGE-O-DOCK

MODEL NUMBER	CAPACITY (POUNDS)	OVERALL WIDTH	USABLE WIDTH	LENGTH (FEET)	NET WT. (POUNDS)	LIST PRICE EACH
YRD-16-7236-H	16,000	72"	66"	36	5670	
YRD-16-8436-H	16,000	84"	78"	36	6090	
YRD-20-7336-H	20,000	73"	66"	36	5880	
YRD-20-8536-H	20,000	85"	78"	36	6300	
YRD-25-7336-H	25,000	73"	66"	36	6090	
YRD-25-8536-H	25,000	85"	78"	36	6510	
YRD-30-7336-H	30,000	73"	66"	36	6300	
YRD-30-8536-H	30,000	85"	78"	36	6720	

LEVELER IS 64" WIDE ON 72" & 73" MODELS AND 75" WIDE ON 84" & 85" MODELS

DC-20/FC-TL

STATIONARY STEEL YARD RAMPS WITH EDGE-O-DOCK

MODEL NUMBER	CAPACITY (POUNDS)	OVERALL WIDTH	USABLE WIDTH	LENGTH (FEET)	NET WT. (POUNDS)	LIST PRICE EACH
MECHANICAL EDGE-O-DOCK AT TRUCK END						
YRDS-16-7236-M	16,000	72"	66"	36	5905	
YRDS-16-8536-M	16,000	85"	78"	36	6325	
YRDS-20-8536-M	20,000	85"	78"	36	6535	
HAND PUMP HYDRAULIC EDGE-O-DOCK AT TRUCK END						
YRDS-16-7236-H	16,000	72"	66"	36	5890	
YRDS-16-8536-H	16,000	85"	78"	36	6310	
YRDS-20-8536-H	20,000	85"	78"	36	6520	

LEVELER IS 64" WIDE ON 72" & 73" MODELS AND 75" WIDE ON 84" & 85" MODELS

DC-20/FC-TL

STEEL YARD RAMP OPTIONS

MODEL NUMBER	DESCRIPTION	NET WT. (POUNDS)	LIST PRICE EACH
YR-HL	Pneumatic Tire & Hand Pump Hydraulic Lift (5 mph max. tow speed) (NOT AVAILABLE ON YRD MODELS)	230	
YR-HL-DC*	Pneumatic Tire & 12V DC Hydraulic Lift (5 mph maximum tow speed) (NOT AVAILABLE ON YRD MODELS)	288	
YR-FS	Fork Lift Pickup Slots (7½"W x 2½"H Usable on 24" Centers)	460	
YR-TB	Tow Loop	60	
YR-TB-H	Tow Bar Hitch	72	
YR-HDRL	42" High Handrails with 21" Midrail (welded) (NON-REMOVABLE)	12 per ft.	
YRD-MD	Mechanical Dockleveler in Lieu of Hydraulic (ON 16,000, 20,000, AND 25,000 LBS. CAPACITIES)		
YR-DH	Holes in Lip to Lag Ramp to Top of Dock		

*INCLUDES ON-BOARD CHARGER

Aluminum Yard Ramps

- 18" x 5" Mold-On-Rubber Tires (standard)
- 4" Curb Height
- Safety Pressure Relief Valve
- Service Height Range is 45" to 62"
- Safety Anchor Chains
- Hand Pump Hydraulic Lift
- Fork Towbar Loop Standard

Portable Aluminum Yard Ramps have a unique design that allows one person to position the ramp, adjust its service height, and load or unload trailers from ground level. Available with steel or rust resistant aluminum grating.



ALUMINUM GRATING series AY

STEEL GRATING series SY

ALUMINUM YARD RAMP WITH STEEL GRATING						
MODEL NUMBER	CAPACITY (POUNDS)	OVERALL WIDTH	USABLE WIDTH	LENGTH (FEET)	NET WT. (POUNDS)	LIST PRICE EACH
SY-167230	16,000	72"	66"	30	3518	
SY-168430	16,000	84"	78"	30	4043	
SY-169330	16,000	93"	87"	30	4515	
SY-167236-L	16,000	72"	66"	36	4305	
SY-168436-L	16,000	84"	78"	36	4830	
SY-169336-L	16,000	93"	87"	36	5303	
SY-207230	20,000	72"	66"	30	3623	
SY-208430	20,000	84"	78"	30	4148	
SY-209330	20,000	93"	87"	30	4620	
SY-207236-L	20,000	72"	66"	36	4410	
SY-208436-L	20,000	84"	78"	36	4935	
SY-209336-L	20,000	93"	87"	36	5408	
SY-257230	25,000	72"	66"	30	3675	
SY-258430	25,000	84"	78"	30	4200	
SY-259330	25,000	93"	87"	30	4725	
SY-257236-L	25,000	72"	66"	36	4463	
SY-258436-L	25,000	84"	78"	36	4988	
SY-259336-L	25,000	93"	87"	36	5513	
SY-307230	30,000	72"	66"	30	3728	
SY-308430	30,000	84"	78"	30	4253	
SY-307236-L	30,000	72"	66"	36	4515	
SY-308436-L	30,000	84"	78"	36	5040	

DC-20/FC-TL

ALUMINUM YARD RAMP WITH ALUMINUM GRATING						
MODEL NUMBER	CAPACITY (POUNDS)	OVERALL WIDTH	USABLE WIDTH	LENGTH (FEET)	NET WT. (POUNDS)	LIST PRICE EACH
AY-167230	16,000	72"	66"	30	2783	
AY-168430	16,000	84"	78"	30	3150	
AY-169330	16,000	93"	87"	30	3465	
AY-167236-L	16,000	72"	66"	36	3360	
AY-168436-L	16,000	84"	78"	36	3728	
AY-169336-L	16,000	93"	87"	36	3990	
AY-207230	20,000	72"	66"	30	2888	
AY-208430	20,000	84"	78"	30	3255	
AY-209330	20,000	93"	87"	30	3570	
AY-207236-L	20,000	72"	66"	36	3465	
AY-208436-L	20,000	84"	78"	36	3833	
AY-209336-L	20,000	93"	87"	36	4095	
AY-257230	25,000	72"	66"	30	2940	
AY-258430	25,000	84"	78"	30	3308	
AY-259330	25,000	93"	87"	30	3675	
AY-257236-L	25,000	72"	66"	36	3578	
AY-258436-L	25,000	84"	78"	36	3885	
AY-259336-L	25,000	93"	87"	36	4200	
AY-307230	30,000	72"	66"	30	3092	
AY-308430	30,000	84"	78"	30	3360	
AY-307236-L	30,000	72"	66"	36	3570	
AY-308436-L	30,000	84"	78"	36	3938	

DC-20/FC-TL



18" x 5" MOLD-ON-RUBBER TIRES ARE STANDARD



HAND PUMP HYDRAULIC LIFT STANDARD



15" OVERLAP INTO TRAILER/BUILDING SAFETY CHAINS STANDARD



PNEUMATIC TIRES OPTION
Service Range will be 40" to 66"
model AY-PNTR
model SY-PNTR

6" CURB HEIGHT OPTION
suffix CRB6

YELLOW SAFETY CURBS OPTION
suffix YEL

LOADING DOCK EQUIPMENT